

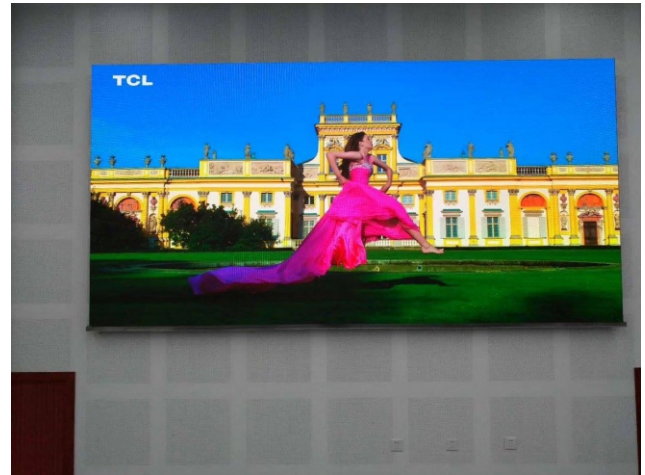
TECHNICAL SPECIFICATIONS

LED Lamp	
Type	SMD2121
Brand	Nationstar
Arrangement	1R1G1B
Chip parameters	Red (620-625nm) IV:(250-300mcd)
Chip parameters	Green (520-525nm) IV:(450-550mcd)
Chip parameters	Blue (470-475nm) IV:(100-120mcd)
LED Module	
Pixel Pitch	4mm
Module Size	256×128mm
Module Resolution	64×32=2048(Dots)
Module Weight	0.3kg
LED Cabinet	
Pixel Density	62500 Dots/sqm
Cabinet Dimension(W*H*D)	768×768×95mm
Cabinet Resolution	192×192=36864(Dots)
Module Qty /Cabinet	3×6=18(Pcs)
Cabinets Material	Aluminum-magnesium alloy Cabinet
Cabinet Weight	18kg/PCS
Brightness	>800cd/sqm
Viewing Angle	140(Horizontal), 140(Vertical)
Nearest Viewing Distance	7m
Power Consumption (Max)	1000 w/sqm
Power Consumption (Average)	300 w/sqm
Refresh Rate	>1800Hz
Drive Mode/Driver Position	Constant driving 1/8 Scan, Combined driver board
Display Function	Text,Graphics,Video
Frame Frequency	no less than 60 frame/sec
Input Voltage	AC110-220V±10%, 50/60Hz
Output Voltage	DC-5V, 40A/60A/80A
Color Grayscale	16bit
Color Processing	R(1024)×G(1024)×B(1024)
Brightness Adjustment	256 color levels, can be adjusted manually and automatically optional
MTBF(mean time between failures)	5000 hours
Life-span	100, 000 hours
Protection Level(front/back)	IP43/IP54
Malfunction Dot Rate	less than 0.0001
Operating Temp/Humidity	0°C-45°C,15%~85%RH
Storage Temp/Humidity	-15°C-50°C,15%~85%RH
Control System	
Control Mode	Synchronization/Asynchronization
Control System	Sending Card, Receiving Card, Receiving HUB
Software	LED Studio (HSTV-lins)
Language	Chinese, Traditional Chinese, English, French, Japanese, Russian, Thai, Spanish, Polish, Italian, Portuguese, Turkish, Dutch, Greek, Bulgarian, Romanian, Arabic,Korean,German,
Control Card Input	DVI, USB; RJ45, HDMI(Sold separately)
Input Signal	AVI/MPG/MPEG/TXT.etc
PC Operating System	Microsoft Windows 10, Windows 7 and XP
Communication Type	Net cable; 3G, WIFI(Sold separately)
Certificate	CE, ROHS, FCC, ISO9001, TUV



En Kaliteli Malzeme,Moduller ve Çipler

- Gri Ölçek - Daha Güzel Fotoğraflar
- Yüksek Çözünürlük
- Dikkatlice Ürün Yükleme
- Hepsi için Tek Fiyat

Su geçirmez
kauçuk contaModüller arası sinyal
ve elektrik bağlantısı

Patentli Mask Tasarımı

UV ışınlarına ve deformasyona
dayanıklı modül kitEn üst seviye
koruyucu kaplamaModül içi
sinyal bağlantısı